



SERVICE INFORMATION FOR EEPROM IC SETTING

1. Press the CLEAR button on the remote control together with  OPEN the Front Panel about 6 seconds.

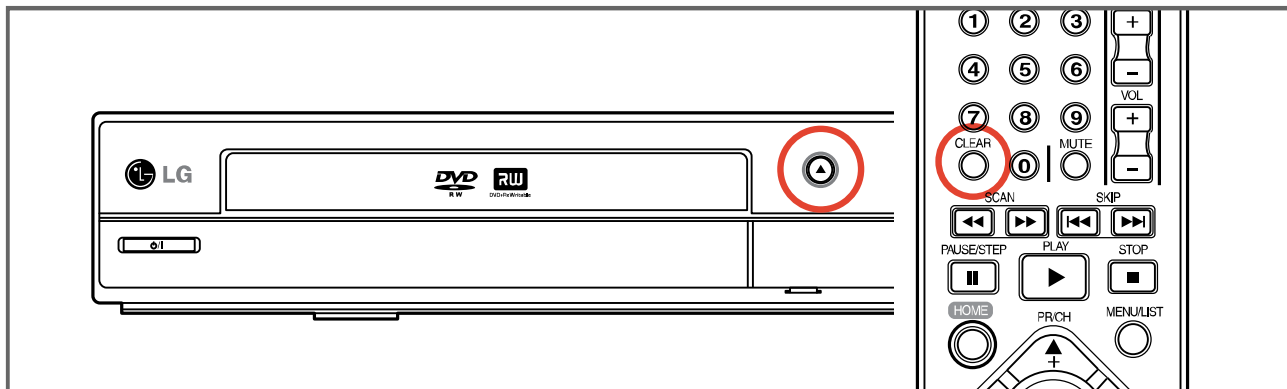

The picture on OSD will be bellow :

MODEL :		Disc Read Time
		DVD 018 Sec OK
		CD 021 Sec NG
OP1 : 00	00000000	M : 10, D13
OP2 : 00	00000000	E : FF (OR)
OP3 : 00	00000000	
OP4 : 00	00000000	
OP5 : 00	00000000	
OP6 : 00	00000000	
OP7 : 00	00000000	Write : OK
OP8 : 00	00000000	EXIT : MP
OP9 : 00	00000000	MOVE : < >
OPA : 00	00000000	EDIT :

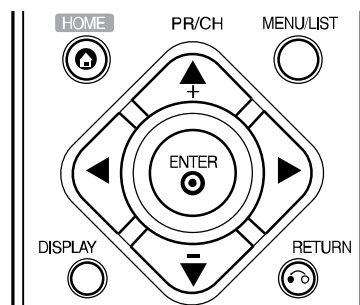

2. To MOVE from OP! to another option, Please  button on the remote control.
3. To CHANGE the option code, Please  button on the remote control.
4. To APPLY the option code, after change the option press ENTER button on remote control.
5. To INITIALIZE the system, press CLEAR button on the remote control together with OPEN on the front panel about 2 seconds.
7. To exit from the option code menu without initialize the system, just turn off the power and then turn on again.